

# Matrix-713

## Linux-Ready Cortex-A5 Industrial IoT Gateway

### Hardware Guide



Version: 1.2  
2023 APRIL

**Artila**

Copyright © Artila Electronics Co., Ltd. All Rights Reserved.

### **Trademarks**

The Artila logo is a registered trademark of Artila Inc. All other trademarks or registered marks in this manual belong to their respective manufacturers.

### **Disclaimer**

Information in this document is subject to change without notice and does not represent a commitment on the part of Artila.

Artila provides this document as is, without warranty of any kind, either expressed or implied, including, but not limited to its particular purpose. Artila reserves the right to make improvements and/or changes to this manual, or to the products and/or the programs described in this manual, at any time.

Information provided in this manual is intended to be accurate and reliable. However, Artila assumes no responsibility for its use, or for any infringements on the rights of third parties that may result from its use.

This product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

### **FCC AND IC INFORMATION:**

This Class A digital apparatus complies with Part 15 of the FCC rules and with Canadian ICES-003

### **Operation is subject to the following two conditions:**

1. This device may not cause interference and
2. This device must accept any interference. Including interference that may cause undesired operation of the device.

## Document Amendment History

Revision	Date	Remark
V 1.0	2018 Apr.	Initial
V 1.01	2019 Nov.	FCC instruction, Spec updated
V 1.1	2020 Dec.	Kernel version updated
V 1.2	2023 Apr.	Kernel version, reset function and specifications revised

---

## Table of Contents

<b>1. Introduction .....</b>	<b>5</b>
1.1 Features.....	5
1.2 Specifications (Hardware) .....	5
1.3 Specifications (Software).....	7
1.4 Packing List.....	8
1.5 Optional Accessory .....	8
1.6 Optional Communication Module.....	8
<b>2. Layout &amp; Dimension.....</b>	<b>9</b>
<b>3. Pin Assignment and Definitions.....</b>	<b>10</b>
3.1 Multi-function Reset Button .....	10
3.2 LED Indicators.....	11
3.3 Serial Port .....	12
3.3.1 RS-485/RS422 Selection (JP4 & J8).....	12
3.3.2 Pin assignment of RS-485/RS422 .....	13
3.3.3 Enable/Disable Termination resistor for RS-485.....	13
3.4 Power Connector.....	14
3.5 Ethernet LAN Port .....	14
3.6 Console Port .....	15
3.7 USB Port.....	15
3.8 CAN Bus Port.....	16
3.9 Audio Port .....	17
3.10 Digital Input .....	17
3.11 Digital Out .....	17
3.12 GPIO .....	17
3.13 miniPCIe socket .....	18
3.14 Micro-SIM socket.....	18
3.15 SD card socket.....	19

## 1. Introduction

Matrix-713, a reliable industrial IoT gateway, based on ARM Cortex-A5, is highly integrated, Linux-Ready with wide-range Temperature operating. It provides an ideal building block that easily integrates with a versatile application, such as industrial control, automation, power management and others.

### 1.1 Features

- ATMEL ATSAMA5D35 536MHz Cortex-A5 Processor
- Linux kernel 5.10.x and file system
- Support Toolchain: gcc 9.3.0 + glibc 2.31
- Support Node-Red, the browser-based flow editor
- 512MB LPDDR2 SDRAM
- 16GB eMMC Flash and 8MB DataFlash for system backup
- 1 x Micro-SD socket
- 1 x Gigabit Ethernet and 1 x 10/100Mbps Ethernet
- Rich I/Os: 4xisolated RS-485, 2xCAN, 2xUSB,2xDI, 2xDO
- 2 x miniPCIe slot & 2 x micro-SIM card socket reserved
- +9 to +48VDC power input
- Rugged Design, Wide-range Temperature operating
- Ultra-low power consumption, less than 3 Watts
- Wall-mounting, Optional DIN RAIL mounting adaptor

### 1.2 Specifications (Hardware)

#### CPU / Memory

- CPU: ATMEL ATSAMA5D35 536MHz w/MMU
- SDRAM: 512MB, LPDDR2
- Flash: 16GB, eMMC
- DataFlash: 8MB, for system backup

#### Network Interface

- Type: 1 x Gigabit and 1 x 10/100Mbps Ethernet
- Connector Type: RJ45

#### USB 2.0 Host Interface

- Host Ports: 2
- Supports 480Mbps hi-speed mode

**CAN Bus Ports**

- Type: 2 x CAN Bus 2.0 A/B compliant ports
- Speed: Up to 1Mbps
- Isolation: 2500Vrms
- CAN 1: 1~2 pin, CAN 2: 3~4 pin, GND: 5pin

**TTY (Serial) Ports**

- 4 x Isolated RS-485 (1500Vrms isolation), P1 ~ P3
- Port 4 (P4) support RS-485 / RS-422 (selectable)
- Direction Control: Auto, by hardware
- Connector: Terminal block

**Console / Debug Ports**

- Support micro-USB console port
- Serial console port (inside the box)

**Audio Out**

- 1 x Line-out R/L port, optional Earphone R/L
- Connector: Earphone-Jack
- Support MP3 and WAV format

**SD Slot**

- SD 2.0 compliant, supports SDHC
- 1 x microSD socket
- Storage capacity: Support up to 64G

**Digital Input**

- 2 x Digital Input channels
- Isolation Protection: 5000Vrms (Photo-Coupler)
- Logical High: 5~24VDC
- Logical Low: 0~1.5VDC

**Relay Output**

- 2 x Digital Output Channels (Solid state Relay)
- Solid State Relay, Normal Open (NO) Type
- Contact Rating: 80VDC@1.5A

### Expansion

- 2 x miniPCIe Full-size socket
- 2 x micro-SIM card socket reserved,  
Support cross-zone communication / seamless integration
- 3 x SMA-type Antenna hole reserved

### Power Requirement

- Input Voltage: +9 ~ +48Vdc (terminal block)
- Typical Power Consumption: 230mA@12VDC

### General

- Realtime Clock: Yes, backup by super capacitor
- Buzzer: Yes
- Watchdog: Yes
- Dimensions (W x L x H): 160 x 118 x 35mm (6.3 x 4.64 x 1.37in)
- Weight: 340g (0.75lb)
- Operating Temperature: 0~70°C (32~158°F)
- Regulation: CE Class A, FCC Class A
- Installation: Wall mounting, DIN-rail mounting (with optional kit)

## 1.3 Specifications (Software)

### Operation System

- Linux kernel 5.10.x
- Supports bootup from eMMC or SD card
- Support Backup/Restore from SD card or USB device
- Boot Loader: Barebox
- File System: EXT4

### Software Development

- Toolchain: gcc 9.3.0 + glibc 2.31
- Supports in-place C/C++ code compilation

### Package Management

- Package repository: Artila self-maintained repository
- Command: Using standard apt-get command

## Popular Packages

- Web server: Apache/Nginx/Lighttpd
- Database: MySQL/SQLite3/PostgreSQL
- Script Language: PHP/Python/Perl/NodeJS
- Text editor: vim/nano/sed
- Administration: Webmin

## Software Operating & Utility

Please refer to “M-A5D35” SoM (System on Module) information for software operating & utility at following: <http://www.artila.com/download/A5D35/Linux/>

### 1.4 Packing List

- **Matrix-713:** Linux-ready Cortex-A5 536MHz Industrial IoT Gateway with 512MB SDRAM, 16GB eMMC Flash

### 1.5 Optional Accessory


- **DK-35A** (36-DK35A-000): DIN RAIL Mounting Kit
- **PWR-12V-1A:** 110~240VAC to 12VDC 1A Power Adaptor
- **Console Cable** (CB-PHDF9-050): 4Pin Wafer Box to DB9 Female, 50cm

### 1.6 Optional Communication Module

- 4G/LTE miniPCle Module with Antenna
- Wifi miniPCle Module with Antenna

## 2. Layout & Dimension

Unit:mm

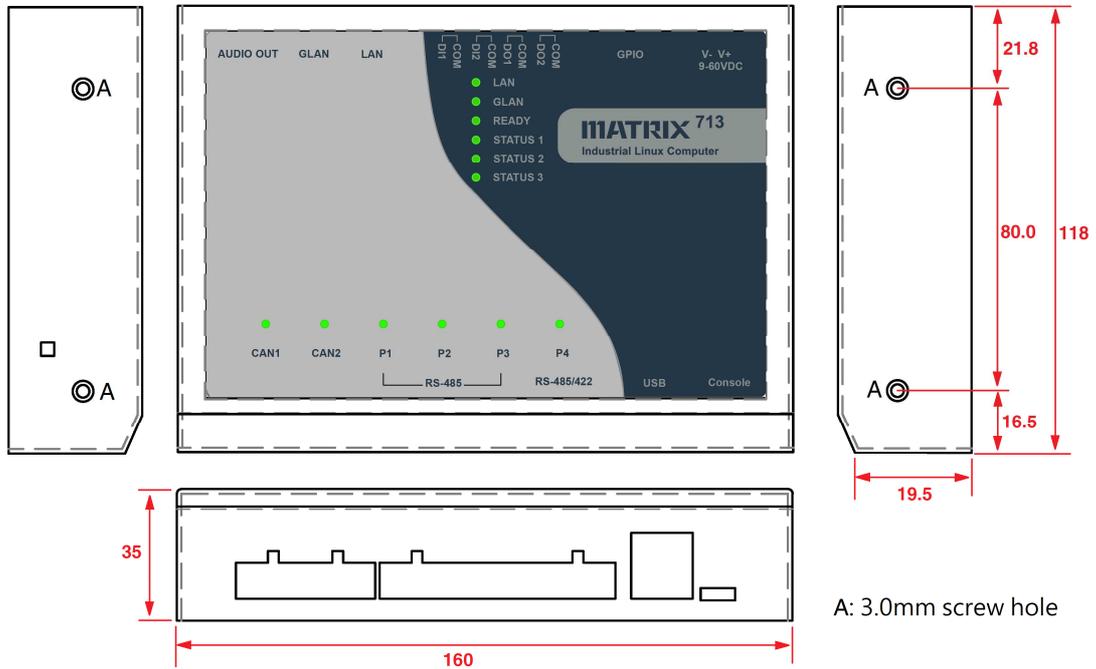

### 3. Pin Assignment and Definitions

#### 3.1 Multi-function Reset Button

The Matrix-713 provides a multi-function reset button located on the right side of the chassis shown below




The behavior of the reset button depends on how long you press the reset button.

Press and hold the reset button	Behavior	Network settings after reboot
< 3 seconds then release	Re-boot the Matrix-752	Retains last user settings
3~10 seconds then release	Reset the network setting (The same setting as factory default)	eth0 IP: addr. by DHCP eth1 IP: IP192.168.2.127
> 10 seconds then release	Restore and back to factory default. User's data may disappear	eth0 IP: addr. by DHCP eth1 IP: IP192.168.2.127

### 3.2 LED Indicators

The LED provides the Matrix-713 operation information. The LED status is described as follow:

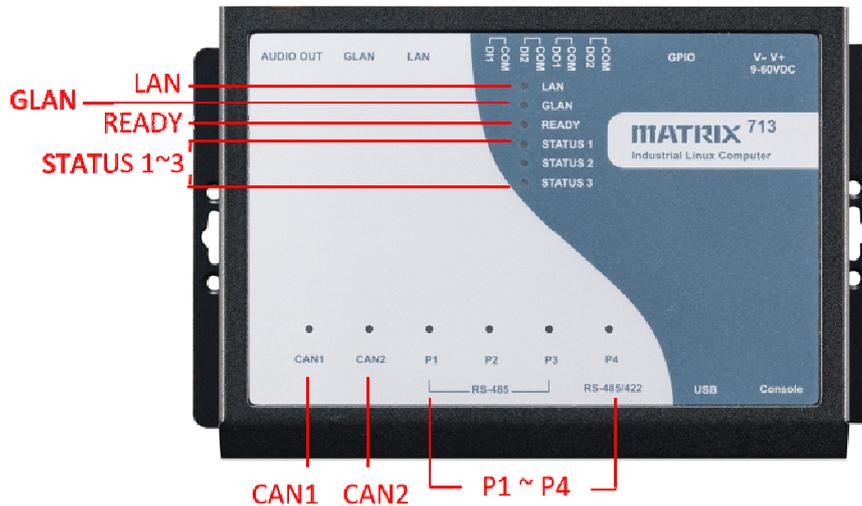


- **“LAN” & “GLAN”** (Network LED indicator): Link and Activity LED will turn ON when the Ethernet cable is connected. When there is network data traffic, this LED will flash.
- **“READY”** (Ready LED indicator): Ready LED will turn on in green color while power is properly supplied. After system is ready for operation, Ready LED will keep in solid orange color and a beep will be heard
- **“STATUS 1, STATUS 2, “STATUS 3”**: Three User define LED indicator, function / activity is assigned by user.
- **“CAN1” & “CAN2”** (CAN bus LED indicator): Link and Activity LED will turn ON when the CAN bus is active. This LED will flash while data communicating.
- **“P1 ~ P4”** (Serial Port LED indicator): These four dual color LEDs indicate the data traffic at the serial ports. When RXD line is high then Green light is ON and when TXD line is high, Yellow light is ON.

### 3.3 Serial Port

The Matrix-713 provide total four RS-485 ports with automatic direction control, also with 1500Vrms isolation protection.


Meanwhile, P4 can be set as RS-422 using the connector labeled 'RS-485/422'.

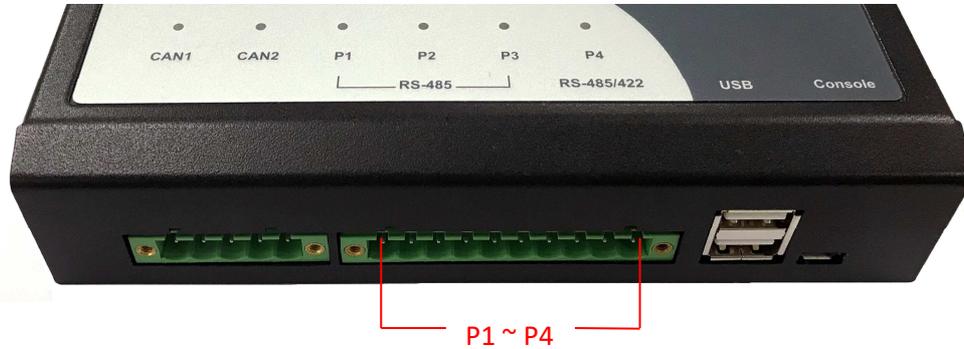


#### 3.3.1 RS-485/RS422 Selection (JP4 & J8)

RS-485 / RS-422 (P4) can be selected by setting jumper at JP4 & J8 (JP4 and J8 must be setting at the same time.)

RS-485 (Default): Setting JP4 at pin3/5, pin4/6 short and J8 P2/3 short

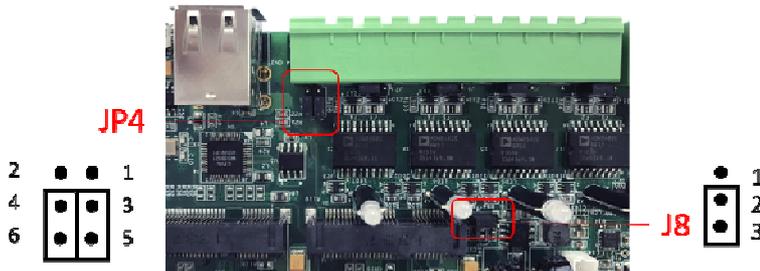

RS-422: Setting JP4 at pin1/3, pin2/4 short and J8 P1/2 short

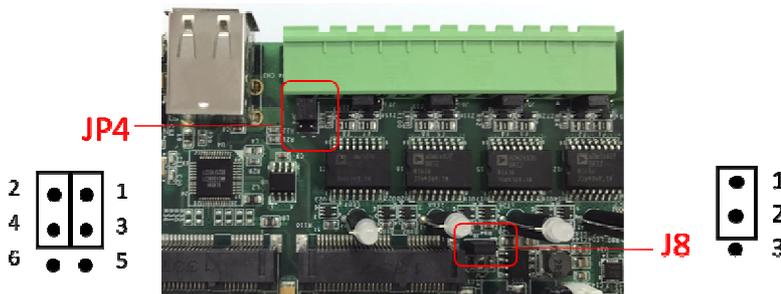

### 3.3.2 Pin assignment of RS-485/RS422

P1		P2		P3		P4	
D+	D-	D+	D-	D+	D-	D+	D-

The pin assignment is shown as following table.

Port No.	P1	P2	P3
RS-485	1500Vrms Isolation protection		
Device Mapping	ttyS1	ttyS2	ttyS3


Port No.	P4
RS-485/RS-422	1500Vrms Isolation protection
Device Mapping	ttyS4

### 3.3.3 Enable/Disable Termination resistor for RS-485

The Matrix-713 provides on-board 120Ohm termination resistor for each RS-485 port. To enable the termination resistor, please remove the upper cover of the Matrix-713, and the adjust the associated jumper to short position1 and position 2, shown below:

Port No.	P1	P2	P3	P4
Jumper No.	J3	J5	J6	J7

Termination Resistor Disabled (default)	
Termination Resistor Enabled	

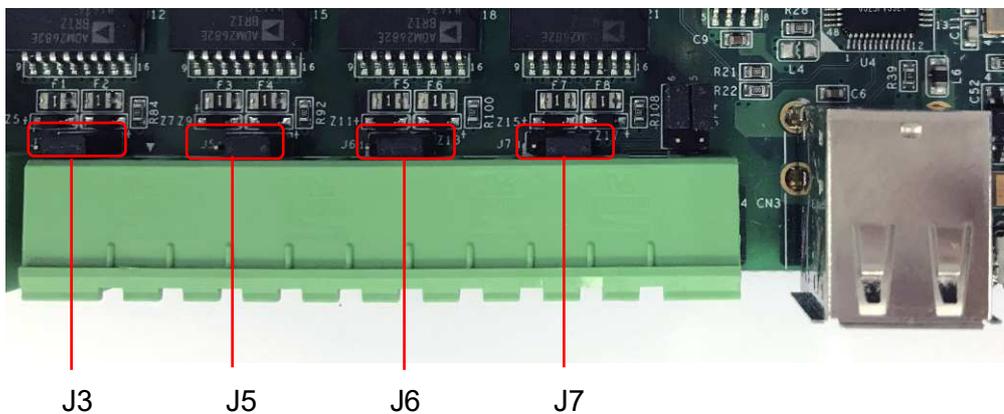

### 3.4 Power Connector

Connecting +9 ~ +48VDC power line to the Power in terminal block. In the meantime, Ready LED will turn on in green color while power is properly supplied.


After system is ready for operation, Ready LED will keep in solid orange color and a beep will be heard

### 3.5 Ethernet LAN Port

The Ethernet Port use RJ45 connector for both 10/100LAN port and GigaLAN port.


Pin definition of 10/100Base-T LAN port

PIN	Signal
1	ETX +
2	ETX -
3	ERX +
6	ERX -



Pin definition of GigaLAN port

PIN	Signal
1	TP0 +
2	TP0 -
3	TP1 +
6	TP1 -
4	TP2 +
5	TP2 -
7	TP3 +
8	TP3 -




### 3.6 Console Port

There are two serial console ports for use:


- Micro-USB connector which is USB client acts as serial console port.



- Debug Console: There is a 4-pin wafer box header (JP3) inside the box.

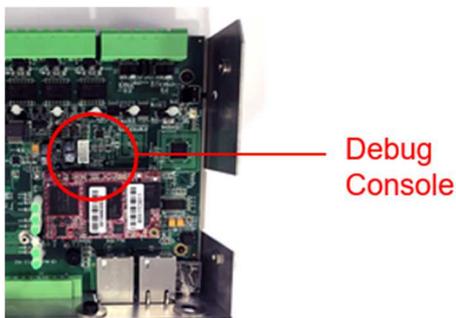

Pin assignment is: RX, TX, +3.3V, GND.



Therefore, you need to open the upper metal case and prepare or purchase a serial console cable to use the serial console port.


Or, it can be purchased “Console Cable” from Artila, P/N is [CB-PHDF9-050](#).

### 3.7 USB Port

Two type-A USB 2.0 ports are built for operation.

### 3.8 CAN Bus Port

The Matrix-713 comes with two CAN bus ports.

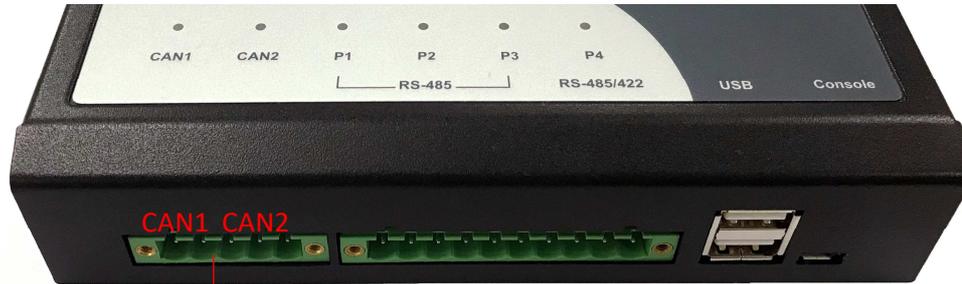

CAN1\_Hi, CAN1\_Lo, CAN2\_Hi, CAN2\_Lo, GND

Users can open the CAN bus ports as network sockets, the socket names are ‘can0’ and ‘can1’ respectively.

<b>Port Label.</b>	CAN1	CAN2
<b>Socket Mapping</b>	can0	can1

#### Pin assignment of CAN Bus Port

<b>Pin</b>	5	4	3	2	1
<b>Signal</b>	GND	CAN2_Lo	CAN2_Hi	CAN1_Lo	CAN1_Hi

#### Enable/Disable Termination resistor for CAN bus


The Matrix-713 provides on-board 120Ohm termination resistor for each CAN port.

Default setting is “Disable” the terminal resistor for CAN bus.

To enable the termination resistor, please remove the upper cover of the Matrix-713, and the adjust the associated jumper to short position1 and position 2, shown below:

CAN Port No.	CAN1	CAN2
Jumper No.	JP5	JP6

Termination Resistor Disabled (Default)	
Termination Resistor Enabled	

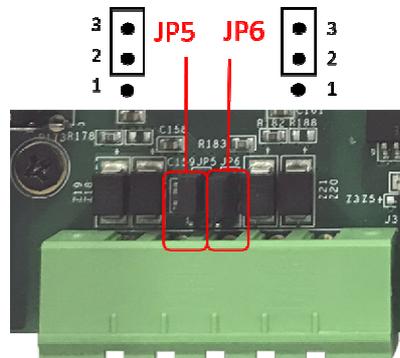

### 3.9 Audio Port

One Audio Out port with line-out Jack as sound out. It allows external speakers, headphones, or other output devices to be connected to, transferring audio to the devices so that it can be heard.

### 3.10 Digital Input

Two channel Digital Input are equipped with 5000Vrms photocoupler isolation which share the same common ground.

The specification of the isolated input channels is:


Logical High: 5~24Vdc

Logical Low: 0~1.5Vdc

Input resistance: 1.8KOhms@0.32W

Response time: 20 $\mu$ s

Isolation: 5000Vrms

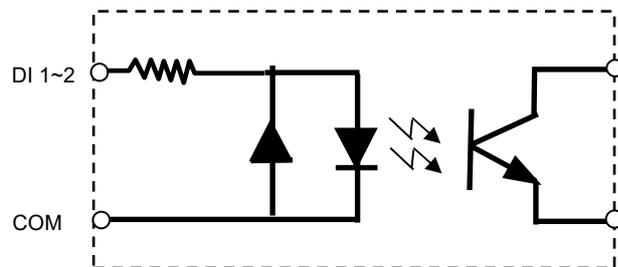


DIx: Isolated digital input channels.

COM: Common ground.

### 3.11 Digital Out

Two channel Digital Output by solid state relay.

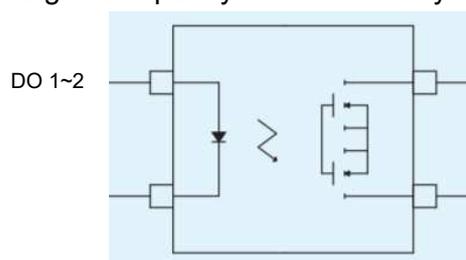


### 3.12 GPIO

Four General-purpose input/output (GPIO) is reserved for user's definition / application.

### 3.13 miniPCle socket

There comes with two miniPCle socket: mPCle A & mPCle B


- Interface: USB
- mPCle A: USB host signal connected to SOM (M-A5D35) directly
- mPCle B: USB host signal is through USB Hub-IC

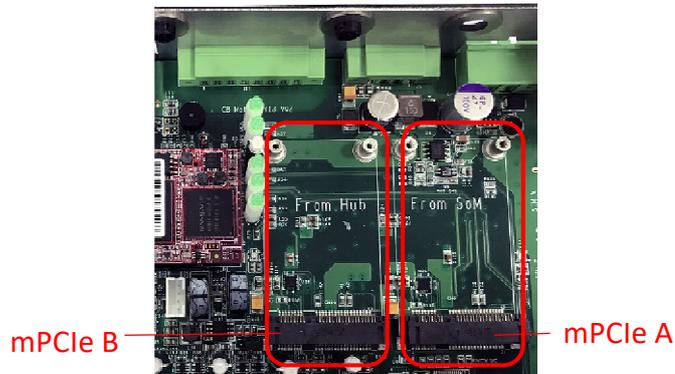

### 3.14 Micro-SIM socket


Dual SIM card socket reserved for communication/networking functionality.

It supports cross-zone communication / seamless integration

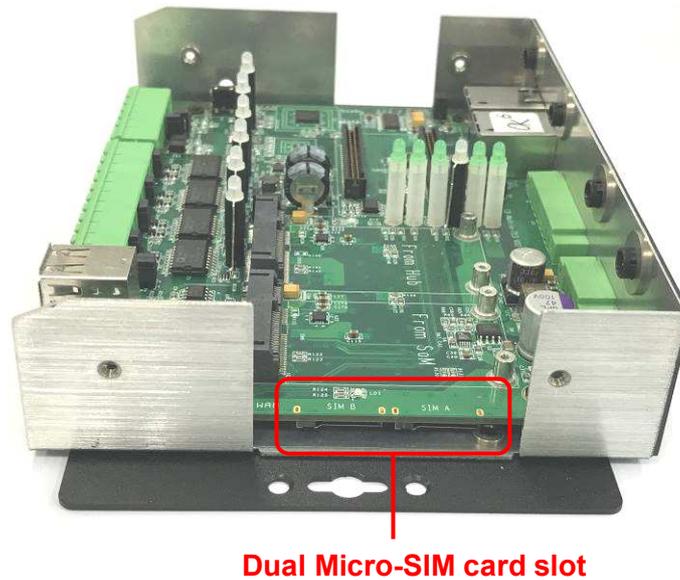

### 3.15 SD card socket

There is a SD card socket inside as data storage. It can be accessed by opening top cover.

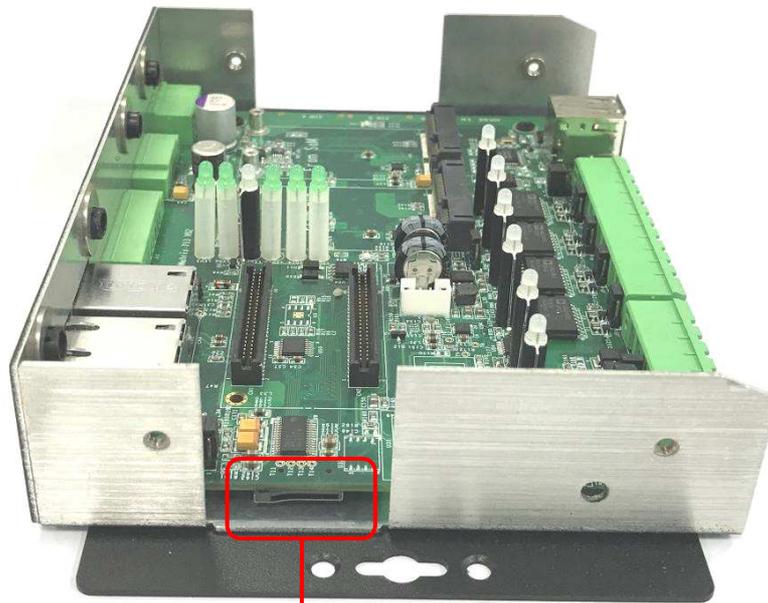

**SD Card Socket**